


WASHERS

Galvanized Steel

FENDER

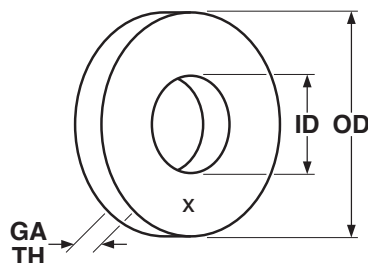

FENDER WASHERS					
Size	Inside Diameter (± .010)	Outside Diameter		Thickness	
		Max	Min	Max	Min
1/4 x 1	.285	1.029	0.992	.132	.036
1/4 x 1-1/4	.285	1.279	1.242	.132	.036
1/4 x 1-1/2	.285	1.529	1.492	.132	.036
1/4 x 2	.285	2.029	1.992	.080	.036
5/16 x 1-1/4	.348	1.279	1.242	.132	.036
5/16 x 1-1/2	.348	1.529	1.492	.132	.036
5/16 x 2	.348	2.029	1.092	.080	.036
5/16 x 2-1/2	.344	2.510	2.490	.080	.036
3/8 x 1-1/4	.406	1.279	1.242	.065	.047
3/8 x 1-3/4	.406 or .422	1.779	1.742	.132	.047
3/8 x 2	.422	2.029	1.992	.080	.047
3/8 x 2-1/2	.422	2.510	2.490	.080	.051
1/2 x 1-1/4	.535	1.279	1.242	.065	.047
1/2 x 1-1/2	.535	1.529	1.492	.065	.047
1/2 x 1-3/4	.535	1.779	1.742	.065	.047
1/2 x 2	.535	2.029	1.992	.065	.047
1/2 x 2-1/2	.535	2.529	2.492	.065	.047
1/2 x 3	.531	3.010	2.990	.080	.051

Description	A flat washer with significantly more surface area than a USS or SAE washer. They are also made from a thinner gauge metal than most flat washers.
Applications/ Advantages	Used where an extra wide bearing surface is required in environments subject to extreme corrosive elements.
Material	<i>Steel</i>
	Washers shall be punched from hot-rolled, hot-rolled and pickled or cold-rolled steel, or shall be machined from bar stock or tubing, or may be forged at the manufacturer's option.
Plating	Hot Dip Galvanized