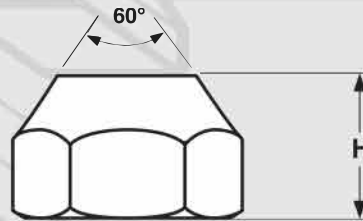



Steel

*Right Hand Wheel Nuts***Nuts****WHEEL NUTS**

Nominal Size or Basic Major Diameter of Thread		F		G		H
		Width Across Flats		Width Across Corners		Thickness
		Max	Min	Max	Min	Max
7/16-20 x 9/16	0.4375	0.752	0.736	0.866	0.840	0.573
1/2-20 x 9/16	0.5000	0.752	0.736	0.866	0.840	0.573
1/2-20 x 5/8	0.5000	0.814	0.798	0.932	0.905	0.636

Description	A six-sided, internally threaded fastener that has chamfered corners at one end and a conical top on the opposite side.
Applications / Advantages	Primary use is as a lug nut for attaching wheels to the threaded studs of an auto's wheel assembly..
Material	Low carbon steel
Plating	Nuts are usually supplied with a zinc finish.